


# 5<sup>TH</sup> WHEEL STORAGE SKIRT INSTALLATION INSTRUCTIONS

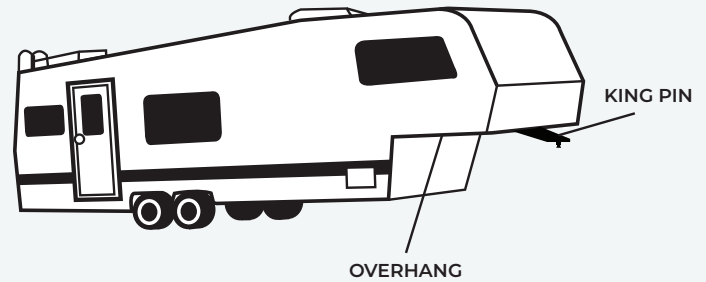

## WHAT YOU NEED

- 1/8" Drill Bit
- Drill
- Ask a friend to assist you in installing the cover for a smoother and more efficient process. Alternatively, use self-adhesive Velcro strips to hold the cover firmly in place.

## ENSURING THE CORRECT COVER SIZE BEFORE INSTALLATION

To determine the proper size:

1. Measure the Length of the Driver's Side Overhang.
2. Measure the Length of the Passenger's Side Overhang.
3. Measure the Width of Your 5th Wheel Trailer.

Add these measurements together to calculate the required cover size length. To ensure a proper fit, allow a few extra inches on each side to fully close off the overhang openings and provide a secure fit.

## INSTALLING YOUR STORAGE SKIRT

### 1. Center the Cut-Out on the King Pin

- **Positioning:** Align the cut-out section of the cover directly over the king pin of your 5th Wheel Trailer to ensure proper placement.

### 2. Install the King Pin Cap (If Applicable)

- **No Protruding King Pin:** If your trailer does not have a protruding king pin, use the provided cap with Velcro to securely close off the cut-out area.

### 3. Mark Snap Screw Locations

- **Alignment:** With the cover centered on the king pin, identify and mark the positions for the first two snap screws on both the right and left sides of the king pin.
- **Preparation:** Use these markings as guides to drill your initial holes accurately.

### 4. Install the First Snap Screws

- **Right Side:** Drill a hole at the right marked position and screw in a snap screw. The head of the screw will serve as the male end of your snap system.
- **Left Side:** Repeat the process on the left marked position.

### 5. Continue Installing Snap Screws on the First Side

- **Selection:** Choose one side (either right or left) to install the next two snap screws.
- **Drilling & Screwing:** Drill and secure the snap screws at the marked positions on the selected side.

### 6. Install Snap Screws on the Opposite Side

- **Opposite Side:** Move to the opposite side of the trailer and drill and screw in the next two snap screws accordingly.

### 7. Alternate Snap Screw Installation

- **Pattern:** Continue alternating between each side of the trailer, drilling and securing snap screws until all necessary screws are installed around the perimeter.

### 8. Attach the Cover to the Snap Screws

- **Snapping On:** Carefully snap the cover onto the newly installed snap screws, ensuring it is evenly and securely attached.

### 9. Further Secure the Cover with Stakes

- **Staking:** Use the included stakes by inserting them through the grommets located at the bottom of the cover.
- **Anchoring:** Drive the stakes into soft ground to provide additional stability and prevent the cover from shifting.

### 10. Completion

- **Final Check:** Ensure all snap screws are securely fastened and the cover is properly anchored with stakes.
- **Result:** Your Storage Skirt is now fully installed and ready to protect your 5th Wheel Trailer.